

TK120 SERIES CURRENT TRANSFORMER

YTEKE®

FEATURES



Window-type current transformer with sealable terminal cover, suitable for primary currents from 2000A to 6300A AC; available in 1A or 5A AC secondary current; and accuracy classes 0.1, 0.2S, 0.2, 0.5S, 0.5 or Class 1.0.

TECHNICAL DATA

PARAMETER	VALUE
Standarts	IEC 60044-1, IEC 61869-2, VDE 0414-1, DIN57414, BS3938, BS7626, EN 61869-2
CT Ratio	From 2000A to 6300A
Rated Power	Up to 60VA
Accuracy class	Class 1, 0.5, 0.5S, 0.2, 0.2S, 0.1
Terminal	Integral terminal cover, high cross section brass terminal for extra safety
Case	Non-flammable self-extinguishing ABS/PC
Mounting	Various mounting options
Ambient temperature (operation)	-25 C ~ +85 C
Primary conductor	70 X 120 mm
Round conductor	Ø 71 mm
Number of input	1
Thermal rated short-time current	$I_{th} = 60 \text{ kA}$
Thermal rated continuous current	$I_d = 1 * I_n$
Rated frequency	50 Hz ... 60 Hz
Surge current limitation factor	FS 5
Test voltage	3 kV for 1 min
Max system voltage	0.72 kV



DIMENSION

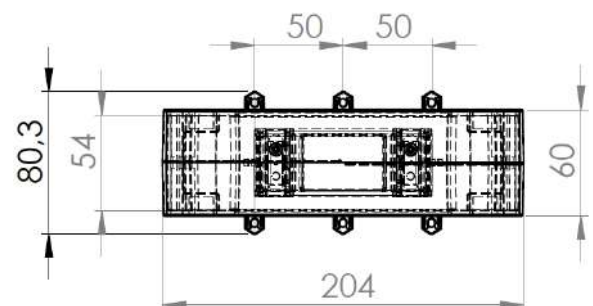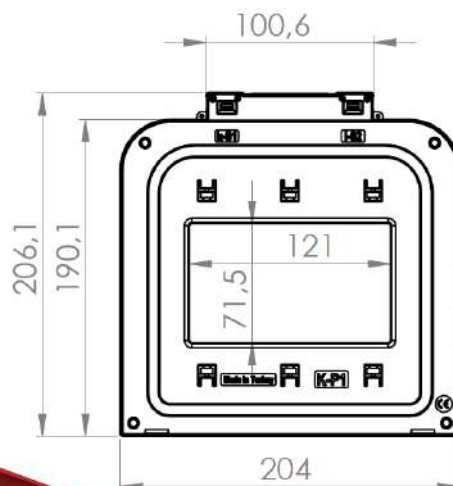

The logo for VTEKE, featuring the brand name in a bold, white, sans-serif font with a registered trademark symbol, set against a red shield-like background.

TK120 SERIES

CURRENT TRANSFORMER

PRODUCT CODES	CLASS		1	0.5	0.5S	0.2	0.2S	0.1
	SERIES	CURRENT RATIO	BURDEN (VA)					
	TK120	2000/5	30	30	30	30	30	30
		2500/5	30	30	30	30	30	30
		3000/5	30	30	30	30	30	30
		3200/5	30	30	30	30	30	30
		4000/5	40	40	40	40	40	40
		5000/5	40	40	40	40	40	40
		6000/5	40	40	40	40	40	40
		6300/5	40	40	40	40	40	40